

FALLPROTEC

Height Safety Products

+352 26 55 09 30 | www.fallprotec.com



FALLPROTEC
FOR METAL FACTORIES



📍 Wallerich Factory, Luxembourg

RISKS ON METAL FACTORIES


The International Labour Organization's* identifies more than 27 hazards in the iron and steel industry that contribute to accidents and injuries. The biggest dangers include Falls from height.

Metal work often involves significant heights, uneven ground and obstructed walkways. It's no surprise that slips, trips and falls are the number one cause of injuries among metal workers worldwide.

Source:
http://www.ilo.org/wcmsp5/groups/public/---ed_protect/---protrav/--safework/documents/normativeinstrument/wcms_112443.pdf


Maintenance of machinery and mobile overhead cranes

If there is no collective protection to eliminate the risk of falling, workers must be provided with and trained in the use of appropriate fall protection equipment, such as lifelines and EPIs. Likewise, an appropriate and timely rescue should be provided to prevent suspension trauma. Founded in a historically strong mining area, Fallprotec has developed fall arrest and height access solutions acknowledged by the steel industry.

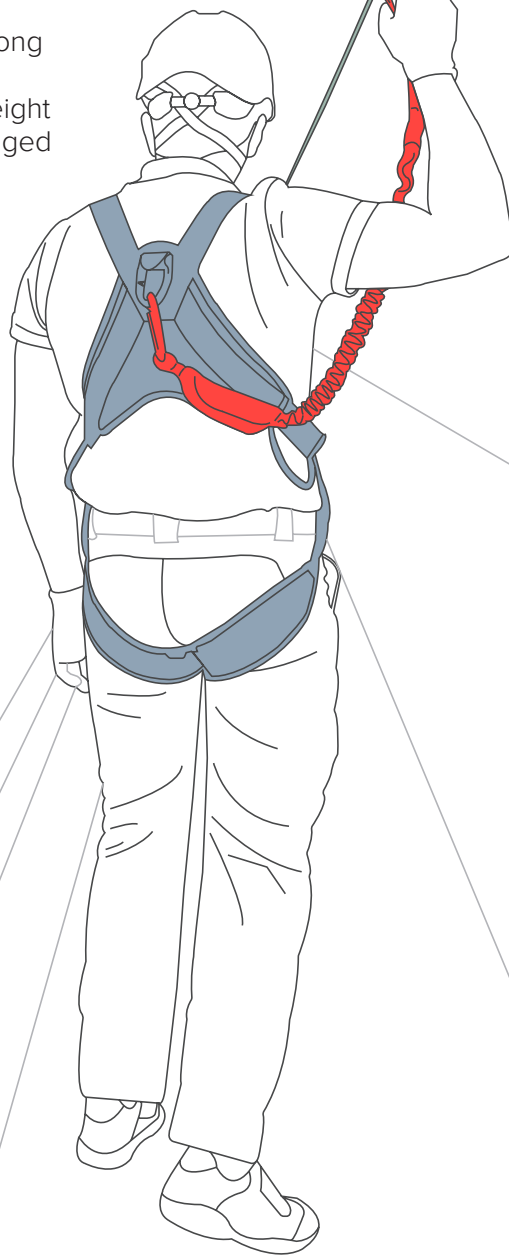

Industrial applications have a low fall clearance due to the strong presence of machinery below the walkways. Fallprotec recommends installations with fall factors ≈ 0 (overhead)

Fall Protection Equipment

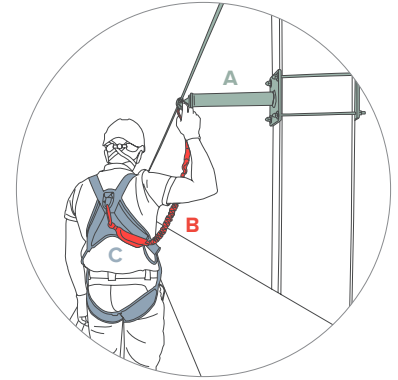

A

Anchorage

Structure capable of supporting 6kN per user attached as part of a complete personal fall arrest system which maintains a safety factor of at least two.

Fallprotec lifeline systems:

- 1) SecuRope Cable Lifeline: A highly resistant cable system with components in stainless steel AISI316.
- 2) SecuRail Rail Lifeline: A highly resistant rail system with components in anodized aluminium. Optimal solution when there is a low fall clearance. Both systems are suitable for intensive use in complex industrial environments. Its components are reliable and durable.

Fixing brackets:

Fallprotec's internal engineering department offers bespoke fixation assemblies, adapted to various beam sizes and distances between them and walkways.

B

Connecting Devices

PPE Equipment with energy-absorbing element to reduce the energy transmitted to the user's body in the event of a fall. Products such as shock absorbing lanyards or self-retracting lifelines connect a worker's harness to the anchorage.

Fallprotec PPE:

- 1) Elastic single and double lanyards of 1,5m or 2m length.
- 2) Self-retractable fall arresters from 2 - 65m length, with aluminium casing, webbing strap or galvanised steel rope.

C

Body Support

A safety harness is a personal protective equipment (PPE) that is designed to catch a person in the event of a fall while working at height. Our full body harness distributes fall arrest forces across the shoulders, thighs and pelvis.


- 1) Two anchor points harness type Prolight or Tempo.
- 2) Elastic two anchor points harness.

SecuRope lifeline on wall configuration with glider LDV133. The wall configuration is the most used in Industrial halls due to the high ceilings height. For this type of configuration Fallprotec suggests the cable LDV005 construction 1x19 and \varnothing 8mm which reduces even more the deflection of the cable and thanks to its properties it is more resistant than others to high temperature conditions and corrosive environments.

EN795:2012 Type C CEN/TS16415:2013



x 4
(2 users max.
per span)

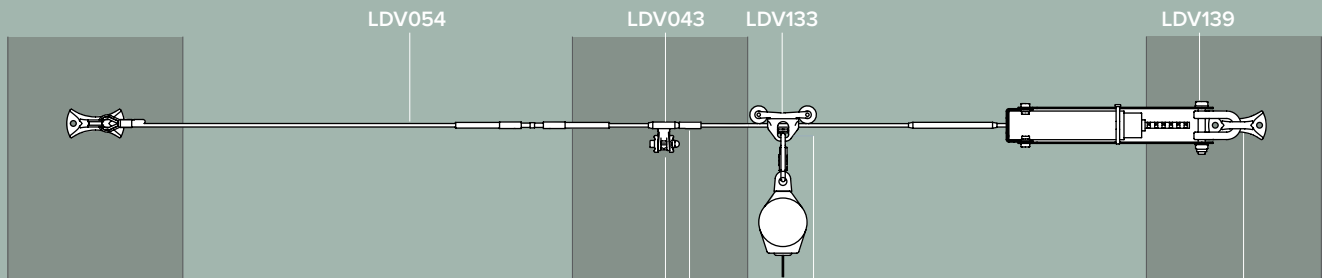

The cable guide located on a plan forming angle of 45° with the horizontal plane increases the absorbing-energy asset of the system


Thanks to the cable crimping technology, the cable deflection is reduced in order to stop the fall in the shortest distance possible.

The LDV133 is the proper glider when the connecting device is a self-retractable fall arrester that weights 10 kg or less. The glider passes smoothly over the intermediate anchors. The end user can move freely along the lifeline without disconnecting and hands-free to operate with tools. If the user is less than 3 m below the life line, 2 m absorbing lanyard, connects the user to the captive glider LDV060.


With its integrated energy absorbing mechanism, it reduces the load transmitted to the host structure.

Maintenance of roofs

Due to the pollution produced by steel production, the roofs of steel mills are very corroded and fragile. Many of them are from the beginning of the 20th century! Work at height in that roofs is a high-risk activity not only for the risk of falling from the edge but also falling through. Fallprotec is capable not only to provide lifelines but also gangways.

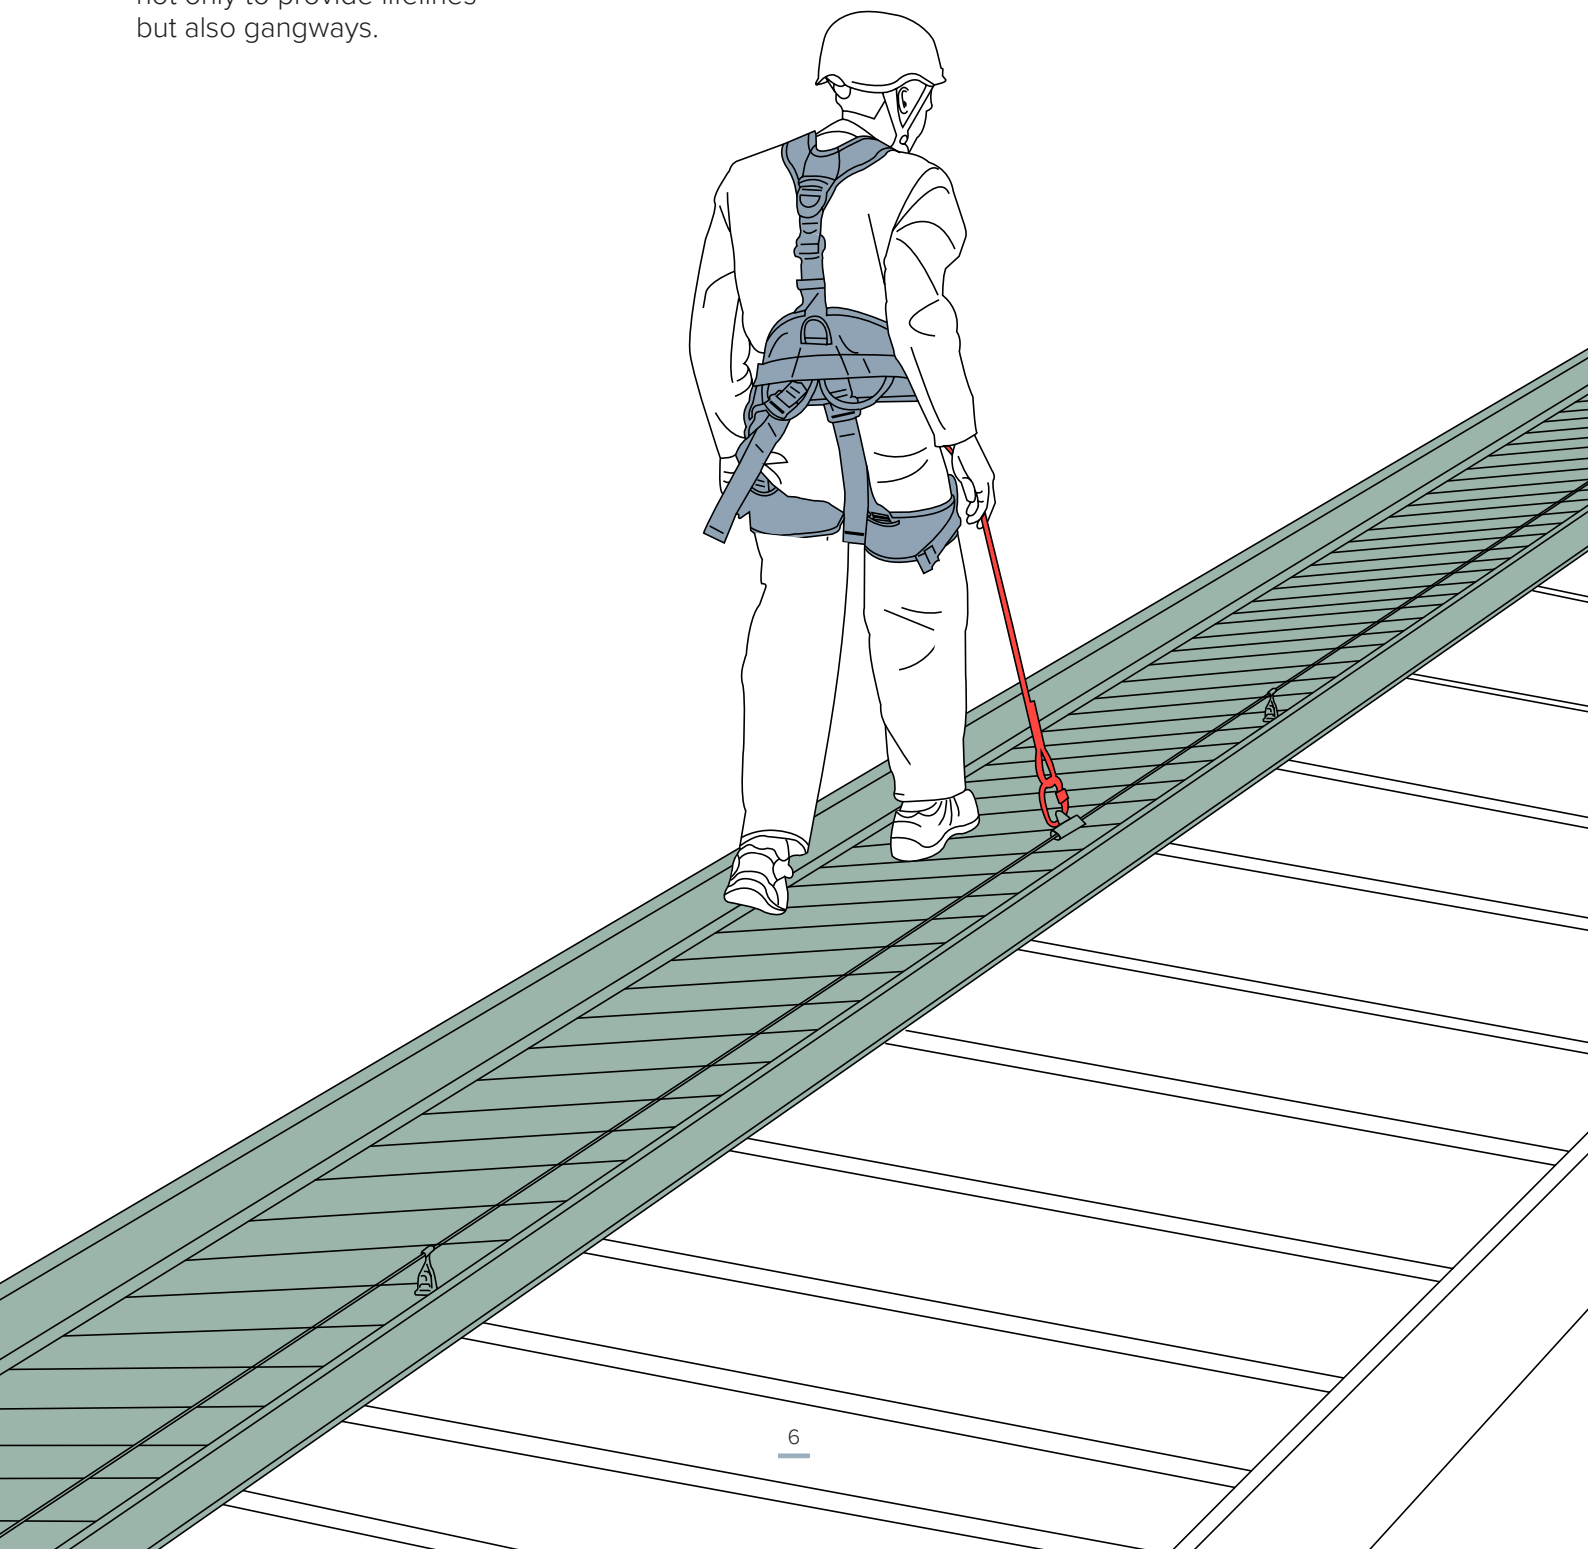

Fall Protection Equipment

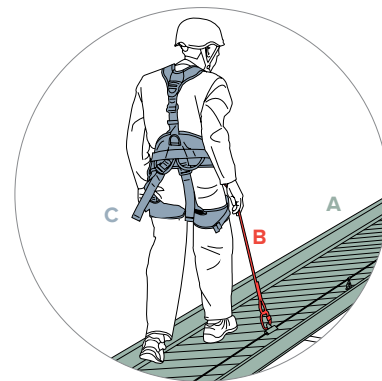

A

Anchorage

A Gangway capable of supporting 6kN per user attached as part of a complete personal fall arrest system which maintains a safety factor of at least two.

Lifeline systems:

SecuRope Cable Lifeline.

SecuRail Rail Lifeline:


Optimal solution when there is a low fall clearance.

Both systems are suitable for intensive use in complex industrial environments. Its components are reliable and durable.


Fixing brackets:

Fallprotec's internal engineering department offers lifeline fixation assemblies for fragile roofs. The fixing assembly on metallic purlin in AISI304 is the most common for steel mill roofs. The supply of the gangway and self drilling screws to the purlin depends on the quality of the roof.

Fixing assembly on metallic purlin LDV137

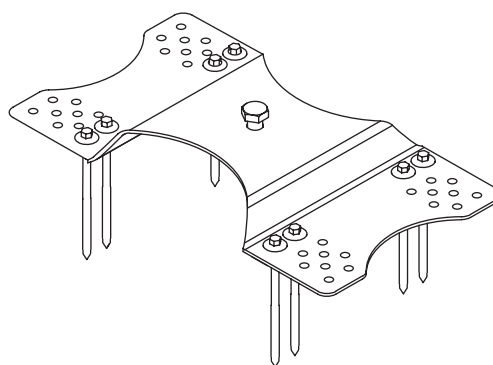

Gangway fixing assembly on fragile roofs

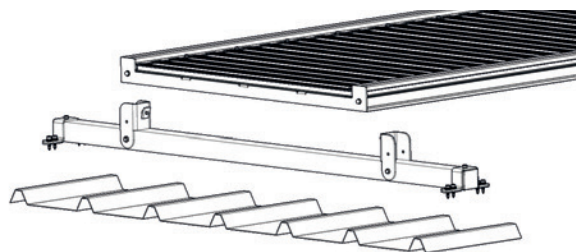

B

Connecting Devices PPE:

Elastic single and double lanyards of 1,5m or 2m length.

C

Body Support

1) Two anchor points harness type Prolight or Tempo.

2) Elastic two anchor points harness.

Body support - Harnesses



Harness Prolight 2 anchor points automatic buckles
HAR001/002/003

Harness Tempo 2 anchor points
HAR020/021/022

Elastic 2 points harness with automatic buckles
HAR072/073/074

EN361



x 1

KG

0,70

EN361



x 1

KG

0,70

EN361



x 1

KG

0,70






Connecting devices - PPE



Elastic lanyard fitted with energy absorber

Ref: HAR076

EN354/355/362





 x 1	 KG 0,60	 2m
 x 1 20mm opening Aluminium	 x 1 60mm opening Aluminium	



Single lanyard fitted with energy absorber

HAR010

EN354/355/362






 x 1	 KG 0,50	 2m
 x 2 20mm opening Zinc plated steel		



Double elastic lanyard fitted with energy absorber

HAR077

EN354/355/362





 x 1	 KG 0,80	 2m
 x 1 20mm opening Zinc plated steel	 x 2 60mm opening Aluminium	



Double lanyard 1,5 m fitted with ener

HAR016

EN354/355/362

 x 1	 KG 0,79	 1,5m
 x 3 20mm opening Zinc plated steel		



Ultra robust block with aluminium casing and galva steel rop

IHWS

EN354/355/362

 x 1	 KG 3,70
-----------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------

Fallprotec's products installations in metal factories worldwide


Fallprotec's internal engineering department had offered bespoke solutions for many industrial sites, while working with a worldwide network of specialized installers, in order to master the complete process of securing plants against the risk of fall.

The scope of offered services includes risk assessments, site surveys, engineering, installation, commissioning, inspection and maintenance.





📍 Wallerich Factory
Luxembourg

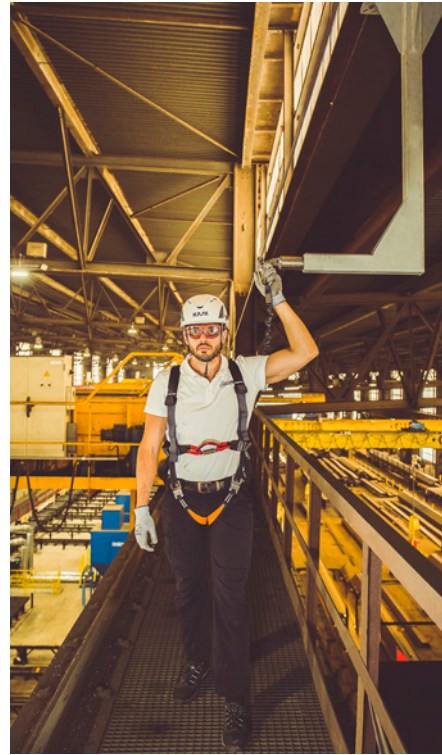


📍 ArcelorMittal Gandrange
France



📍 ArcelorMittal Dudelange
Luxembourg



📍 Hindalco Calcutta
India

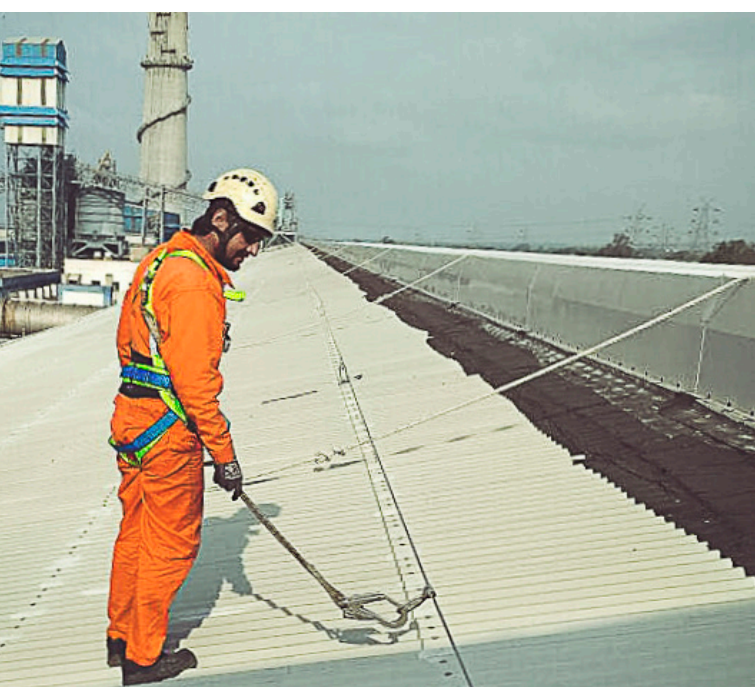

📍 SiderPeru Gerdau Group
Peru



📍 ArcelorMittal Monza
Italy



📍 Gerdau Diaco
Colombia



📍 ArcelorMittal Belval
Luxembourg



FALLPROTEC SA

43-45 ZA Op Zaemer
4959 Bascharage
Luxemburgo
T: +352 26 55 09 30
F: +352 26 55 09 30 55
marketing@fallprotec.com

FALLPROTEC SA

Eduard Calvet i Pintó 4
Pol. Ind. Vallmorena
08339 Vilassar de Dalt
España
T: +34 93 114 22 31
info@fallprotec.es

FALLPROTEC LATAM

Avda. Alcalde Carlos
Valdovinos 2199
Santiago de Chile
Región Metropolitana
T: +56 2 2512 6133
latam@fallprotec.com

FALLPROTEC CHINA

Habitación 213, Edificio 6
No. 398, Jinglian Road
Distrito Minhang
Shanghai, China

T: +86 21 3126 8606
F: +86 21 2281 0168

+352 26 55 09 30
www.fallprotec.com

Follow us

fallprotec |    

FALLPROTEC

Height Safety Products

