FALLPROTEC

Height Safety Products





MONORAIL FOR HEIGHT SAFETY AND SUSPENDED WORKS

EN1808:2015 ASME/ANSI-A120.1-2014 & IWCA I-14.1 The SafeAccess rail is used in height access systems for façade cleaning and maintenance. It can be installed during the construction or on existing buildings, on façades, ceilings, canopies and rooftops.

An ultra-resisting height safety rail

The SafeAccess monorail has been tested and certified according to European standards.

- Most efficient system in terms of operational costs specifications
- Bespoke system, fitting your building. Our engineering department accompanies you for setting up the equipment
- Bendable on demand (minimal radius of 600mm)
- Low weight and maximum inertia
- Compatible with any type of architecture with a height between 5 and 250m
- Compatible with rope access technicians, RopeClimber, cradles and travelling ladders


Applications:







Building Access maintenace Industry

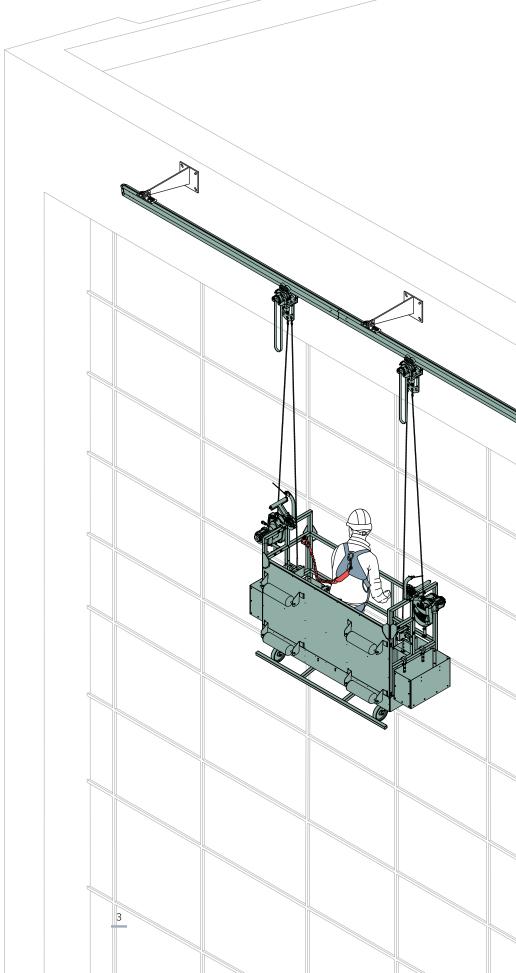

SafeAccess rail for suspension works

A monorail system is a Building Maintenance Unit made of:

- a bracket connecting the rail to the building
- an aluminium rail
- high strength suspension trollevs
- suspended platform

By mastering all the aspects of the project, the engineering department ensures that the suspendec platform reaches the entire facade safely.


EN1808:2015









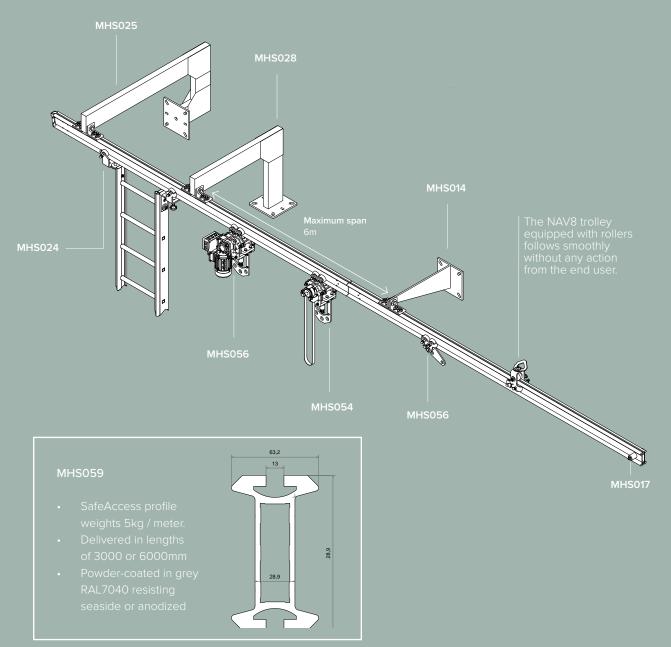

SafeAccess brackets

The choice of the bracket depends of several parameters:

- host structure (concrete or steel beam)
- is the bracket fixed to the ceiling, wall or inside of a parapet
- type of suspended equipment
- presence of insulating material or decorative elements.

The engineer's department of Fallprotec creates bespoke designs, calculation notes, implantation drawings etc.













SafeAccess trolleys



NAV7 - Trolley for rope access

Abseiling trolley equiped with a manual brake, recommended for distances over 100m.

MHS048



3

NAV1 - Trolley for suspension works

Trolley manually operated by drive belt with rope and pulley

MHS054



3

NAV4 - Trolley for suspension works

Horizontal motorised trolley, recommended for distances over 100m.

MHS056



3

NAV8 - Trolley for fall arrest

Trolley for rail fixed to the ridge fitted with an anchor point, recommended for distances over 100m.

MHS049



Fallprotec's SafeAccess worldwide

Click here to view more case studies worldwide on our website



CHOOSING FALLPROTEC MEANS







- One reference for global assistance
- Certified by notifying bodies as per latest European standard
- Quality control: ISO9001:2015.
 E.C. Quality of Production « Article 11B »
- Product liability insurance
- Warranty
- One-Stop-Shop

• Apple Tel Aviv, Israel






Knightbridge Manilla, Philippines







Ven Amsterdam Amsterdam, Netherlands

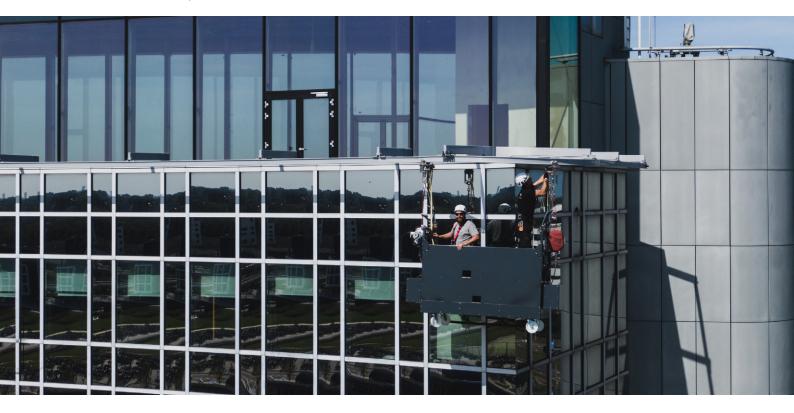

Sandton mall Sandton, South Africa

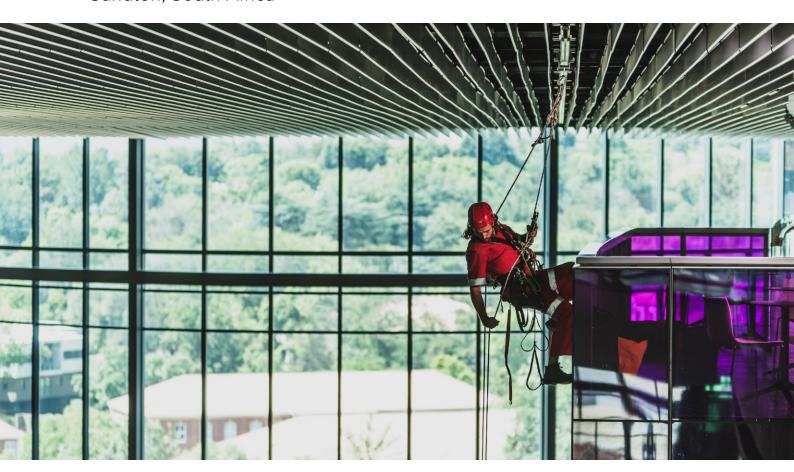

• Urban complex Stockholm, Sweden

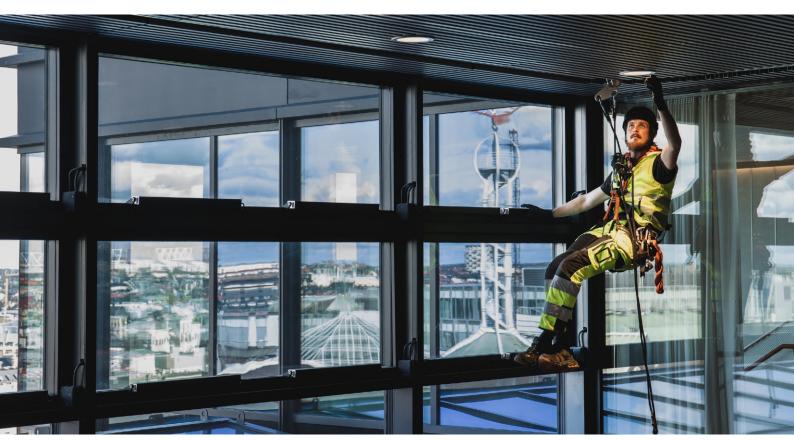



FALLPROTEC SA

ZARO 2-4 rue Gustave Loosé 8346 Grass Luxembourg

T: +352 26 55 09 30 marketing@fallprotec.com

FALLPROTEC SL

Eduard Calvet i Pintó 4 Pol. Ind. Vallmorena 08339 Vilassar de Dalt España

T: +34 93 114 22 31 info@fallprotec.es

FALLPROTEC USA

3500 S Dupont Hwy Dover, DE 19901 **USA**

T: +1 205 388 0548 usa@fallprotec.com

FALLPROTEC ME

JLT, Mazaya Business Avenue, Tower BB1, Oce 1108 P. O. Box 487115 United Arab Emirates

T: +971 4 399 3764 eh@fallprotec-me.com

FALLPROTEC SRL

Via Giovanni Falcone 23 24050 Zanica Bergamo

T: +39 375 713 8515 va@fallprotec.com

+352 26 55 09 30 www.fallprotec.com

Follow us









FALLPROTEC

Height Safety Products

